



Ni base alloy rutile flux cored wire for all position welding  
 AWS A5.34 ENiCrMo3T1-4  
 EN ISO 12153 T Ni 6625 P M21 2

## Features and typical fields of application

- PREMIARC™ DW-N625 is a gas shielded flux cored wire whose chemical design is optimized to weld 625, 825 type Ni-Cr-Mo alloy, full austenitic stainless steel, dissimilar joints or 9% Ni steel for cryogenic application.
- Featuring outstanding weldability for all position with excellent mechanical properties for welded joints as well as overlay use with 75-80%Ar-bal.CO<sub>2</sub> shielding gas.

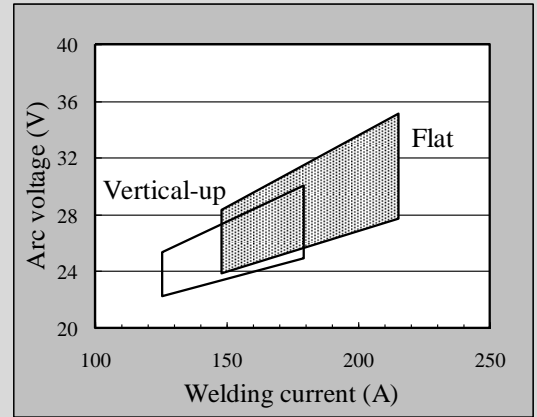


Figure: Welding parameter recommendation

## Typical chemical composition of weld metal per AWS A5.34 w/80%Ar-20%CO<sub>2</sub>

C	Si	Mn	P	S	Cu
0.03	0.24	0.20	0.006	0.005	<0.01
Ni	Cr	Mo	Ti	Fe	Nb+Ta
64.8	21.4	8.2	0.21	1.5	3.2

## Typical mechanical properties of weld metal per AWS A5.34 w/80%Ar-20%CO<sub>2</sub>

	0.2% PS(ksi)	TS (ksi)	El (%)	CVN (ft-lbs) at -320°F
DW-N625	68	109	46	60
ENiCrMo3Tx-y	N/A	100 min.	25 min.	N/A

## Packages

Wire Dia.	0.045"	Package	28lbs spool
-----------	--------	---------	-------------

### DISCLAIMER

- Information in this material, such as chemical compositions and mechanical properties, is typical or an example for explaining the features and performances of our products, and it does not mean guarantee unless otherwise it is specified.
- Information contained herein is subject to change without notice. Please kindly contact Kobelco for latest information.



**WARNING:** This product can expose you to chemicals including Nickel and Titanium Dioxide, which are known to the State of California to cause cancer, and Chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**KOBELCO WELDING OF AMERICA INC.**



4755 Alpine Drive, Suite 250, Stafford, Texas 77477  
 TEL: 281-240-5600 FAX: 281-240-5625  
<https://www.kobelcowelding.com>